

PedestalPro S

STACKABLE PAVING SUPPORT PADS



Product Datasheet

PedestalPro S are low height stackable paving supports and are the perfect solution where paving requires elevation off the ground by a minimal height.

Simple to install and adjust, they are a very economical method of creating a clear space below the paving, which allows for rapid water drainage.




KEY BENEFITS

- Robust product ensuring stability of paving area
- Perfect for very low height installations; adjusts down to 22mm
- Accommodates all types of calibrated paving - concrete, granite, porcelain, etc.

STACKABLE PAVING SUPPORTS

PedestalPro S stackable paving supports create a perfectly uniform gap below the slabs, and can be stacked up to 3 units high. Designed for use on totally flat surfaces, such as a roof area with 0° fall, and incorporating a 3mm shim which allows for finer height adjustment where required.

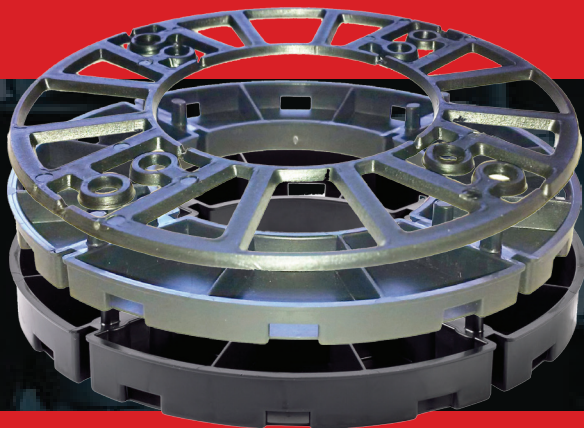

RUBBER PAVING SUPPORT


Rubber paving supports have increased shock absorbent properties, making them ideal for use with old or less durable membranes. Manufactured from solid rubber, they also have enhanced acoustic characteristics over the polypropylene options.

TECHNICAL SPECIFICATIONS

Material	PP Polypropylene (recyclable), UV resistant
Biological/Chemical	Resistant to moulds, algae, alkali, bitumen
Height Range	3 – 51mm
Diameter	150mm
Spacer tab thicknesses	3mm
Max allowable load (grate)	-40°C – 120°C



15mm stackable paving support



10mm stackable paving support



3mm stackable paving support shim
(For use in conjunction WITH 10 & 15mm stackable for fine height adjustment)

TECHNICAL SPECIFICATIONS

Material	Rubber
Biological/Chemical	Resistant to moulds, algae, alkali, bitumen
Height Range	9mm
Diameter	120mm
Spacer tab thicknesses	4mm