

# PedestalPro PH


SELF-LEVELLING, ADJUSTABLE  
PEDESTALS



## Product Datasheet

The PedestalPro PH self-levelling adjustable pedestal is unrivalled in its field. Designed to support any type of calibrated paving, it offers the highest compressive strength of any pedestal system on the market.

Its unique self-levelling head and impressive height range will accommodate even the most complex paving issues – including sloping areas, drainage and maintenance access.

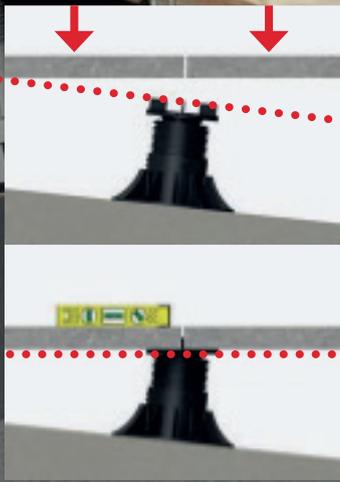

### KEY BENEFITS

- Unique self-levelling design offers slope correction up to 10.5%
- Ultimate compression strength for maximum durability
- Simple design ensures rapid installation
- For use with any type of calibrated paving - concrete, granite, porcelain, etc.

### SELF-LEVELLING PAVING SUPPORT HEAD

Due to its innovative self-levelling head design, PedestalPro Paving System has the fastest installation time of any pedestal system available.

- Utilises the 'ball & socket' joint concept to allow a free moving captive head
- Provides slope correction of up to 10.5% (6°)
- Paving or decking is laid onto the pedestals without having to manually adjust slope correction. This results in significant time savings and a perfectly level finished area
- Alternative head available to support decking.

### HEIGHT EXTENSION COLLAR

A very simple design with a single 'click' motion to attach, these extension collars build up the pedestals in 100mm increments.

### WIDE SUPPORTING BASE

PedestalPro PH Paving System creates an evenly spread load on the surface below, ensuring that membranes are well protected. Pedestals are loose laid and do not require fixing to the floor. Designed with water drainage holes to prevent moisture build-up.

### ADJUSTABLE THREADED SECTION

This heavy grade threaded section allows you to adjust the height in minute increments, within the given range. It's easy to adjust, simply grab and twist.



# PedestalPro PH

SELF-LEVELLING, ADJUSTABLE  
PEDESTALS



## Product Datasheet

### SIZE RANGE

The vast height range of the PedestalPro self-levelling adjustable pedestal allows it to overcome very large changes in surface level, and also conceal services, ductwork and pipes beneath the paving.

### TECHNICAL SPECIFICATIONS

Material	PP Polypropylene (recyclable), UV resistant
Biological/Chemical	Resistant to moulds, algae, alkali, bitumen
Height Range	40-56mm, 50-70mm, 70-110mm, 110-160mm, 150-210mm, 200-300mm, 300-400mm, 400-500mm, 600-700mm, 700-800mm, 800-900mm, 900-1000mm
Compression	2100 Kg (certified compression data available on request)
Base Diameter	210mm / 220mm
Head Diameter	130mm
Spacer tab thicknesses	2mm / 4mm (standard) / 6mm
Working Temperature	-40°C – 120°C



Base Diameter 220mm

Base Diameter 210mm

### OPTIONAL EXTRAS

#### Perimeter Spacer Tab



Spaces the paving evenly against perimeter walls/ parapets, reducing movement and ensuring membrane protection.

#### Base Rubber Shock Pad



Installed to enhance acoustic properties, or where membrane requires additional protection.

#### Non-rocking head



For use when the head needs to remain in the flat position.

#### Head Rubber Shock Pad



Installed to enhance acoustic properties, and reduce movement with specific paving types e.g. porcelain.



### PEDESTAL QUANTITY CALCULATIONS

For help calculating quantities of pedestals you require, or for any other guidance regarding your project, call Roof-Pro on 03335 771 500.